




USB Global Shutter Color Low Distortion Camera Module



1MP OV9782
(SKU: B0385)

QUICK START GUIDE

SPECS

Camera	
Sensor	Global Shutter Color OV9782
Optical Size	1/4 inch
Resolution	1MP 1280H x 800V
Data Format	MJPEG/YUY2
Pixel Size	3µm*3µm
Dynamic Range	68DB
Frame rate	MJPG 100fps@1280x800/ 800x600/ 640x480/ 320x240; YUY 10fps@1280x800/ 1280x720.
Lens	
Field of View (FOV)	70°(H)
Lens Mount	M12*P0.5 mm
IR Sensitivity	With IR filter, sensitive to Visible light
Functionality and Compatibility	
Auto Controlled Features	Exposure/ White balance
System Compatibility	Win7/8/10, Linux, Mac and OS with UVC driver
Power	
Power Supply	DC 5V
Working Current	MAX 200mA
Physical	
Operating Temp.	-4°F~158°F (-20°C~+70°C)
Dimension	38x38mm
Cable Length	Default 3.3ft (1M)

INTRODUCTION

• About Arducam

Arducam has been a professional designer and manufacturer of SPI, MIPI, DVP and USB cameras since 2012. We also offer customized turnkey design and manufacturing solution services for customers who want their products to be unique.

• About this USB Camera

The B0385 is a new member of the Arducam's USB camera family. It's 1MP global shutter color, UVC compliant, low distortion USB 2.0 camera. This USB camera is based on the 1/4" OV9782 image sensor, and you can read more about its specs in the next chapter. Arducam also provides the sample application that demonstrates some of the features of this camera.

• About UVC

The B0385 is a UVC-compliant camera. The native UVC drivers of Windows, Linux and Mac shall be compatible with this camera so that it does not require extra drivers to be installed.

• About Customer Service

If you need our help or want to customize other models of USB cameras, feel free to contact us at support@arducam.com

QUICK START

• How to download the program

Download the APP Amcap from the following link <https://www.arducam.com/downloads/app/AMCap.exe>

NOTE: For Mac OS, please open the native software facetime and select the video camera "Arducam OV9782 USB Camera".

• How to connect the camera

Connect the one end of the USB 2.0 cable to the USB 2.0 connector provided on the back of B0385, and connect the other end to the USB 2.0 host controller on the computer.

How to use the program (Windows demo only)

The Menu bar at the top of the shown image contains few menu items and the current preview resolution and the frame rate are displayed on the bottom bar when the application is running. The following sections describe each of the menu items in detail.


• Menu>Devices

This menu will show the available video devices to host PC. The B0385 named "Arducam OV9782 USB Camera".





• Menu>Options

The options menu can be used to select the preview and image parameters supported by this camera.





How to use the program (Windows demo only)

- Video Capture Pin

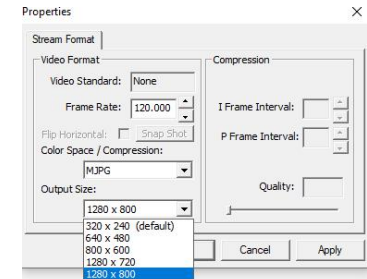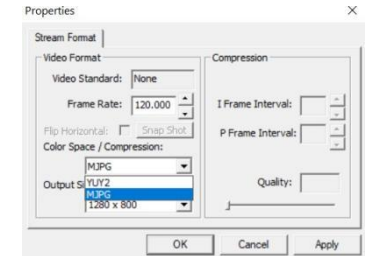

How to use the program (Windows demo only)


- Video Capture Filter -> Video Proc Amp/Camera Control

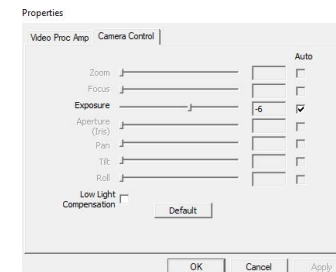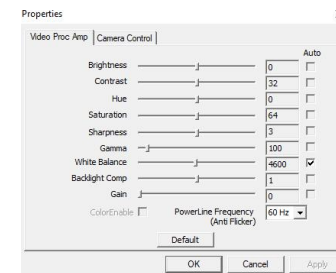

How to use the program (Windows demo only)

• Menu> Capture

The capture menu is used to capture the still image and video by using this application. You can also select the related parameters.

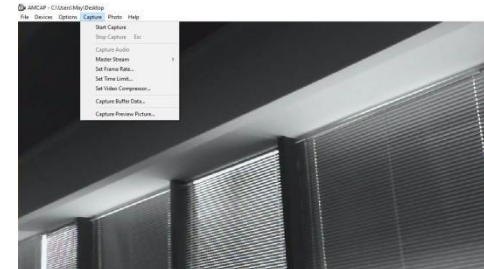

NOTE: This camera module support trigger via an external signal, please refer to the Doc page to get the instruction <https://www.arducam.com/docs/uvc-camera-module/access-camera-demo/ov9782-global-shutter-uvc-camera/>