

Quick Start Guide


Raspberry Pi Universal VESA Mount

Thank you for purchasing the Raspberry Pi Universal VESA Mount, the best solution to mount your Raspberry Pi 1B, 1B+, 2B, 3B, Zero or Zero W to the back of a monitor – directly or together with a case.

This product was designed and manufactured by Welectron in Germany.

We hope you are happy, your feedback is welcome!

Mounting Hole Pattern

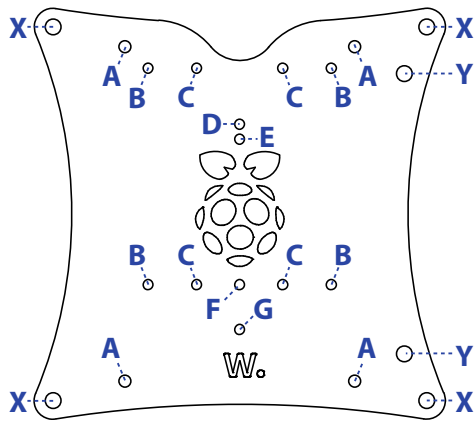


Parts List

	Part	Qty
#1	Stainless Steel VESA Plate	1
#2	Screw M4x16mm	4
#3	Plastic Spacer M4x5mm	4
#4	Screw M3x5mm	2
#5	Screw M2.5x8mm	4
#6	Washer M2.5	4
#7	Nut M2.5	8

Mounting the Raspberry Pi directly to the VESA Plate

Raspberry Pi Model	Mounting Holes	Fasteners
1B, 1B+, 2B, 3B	B (4x)	#5, #6, #7
Zero, Zero W	C (4x)	(4x) (4x) (8x)



Mounting a Raspberry Pi Case to the VESA Plate

Case Model	Mounting Holes	Fasteners
Official Case	B (4x)	#5 (4x), #7 (4x) <i>2.5mm holes need to be drilled in lower case half</i>
OneNineDesign / RS Pro Case	D+G	#4 (2x)
ModMyPi Modular Case		
- Central screws	E+F	#4 (2x)
- Outer screws	B (4x)	Use screws delivered with case
Flirc Aluminum Case	B (4x)	Use screws delivered with case
Welectron Basic+ Case	B (4x)	Use screws delivered with case
Welectron SnapFit Case	D+F	#4 (2x)

Mounting the VESA Plate to a Monitor

Mounting Method	Mounting Holes	Fasteners
VESA 75x75 mm	Y (2x)	
VESA 100x100 mm		
- Monitor on stand, VESA holes free	X (4x)	#2, #3
- Monitor on second VESA mount, VESA holes occupied*	X (2x)	

* Mount Universal VESA Mount on only one side on top of the monitor's VESA mount plate.

Montageanleitung


Raspberry Pi Universal VESA Mount

Herzlichen Dank für den Kauf des Raspberry Pi Universal VESA Mount, der besten Lösung, um Ihren Raspberry Pi 1B, 1B+, 2B, 3B, Zero oder Zero W an einem Bildschirm zu befestigen – direkt oder zusammen mit einem Gehäuse.

Dieses Produkt wurde von Welectron in Deutschland entwickelt und hergestellt.

Wir hoffen Sie sind zufrieden, Ihr Feedback ist willkommen!

Befestigungsbohrbild

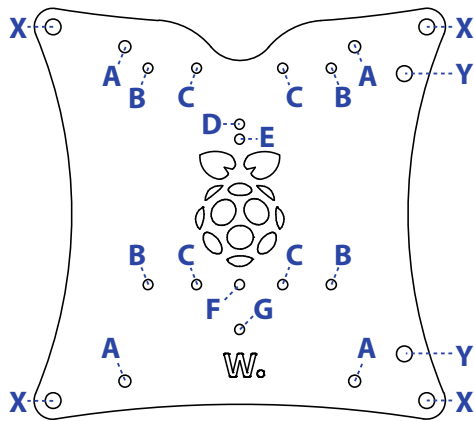


Teileliste

	Teil	Anz.
#1	Edelstahl VESA-Halterung	1
#2	Schraube M4x16mm	4
#3	Distanzrolle M4x5mm	4
#4	Schraube M3x5mm	2
#5	Schraube M2.5x8mm	4
#6	Unterlegscheibe M2.5	4
#7	Mutter M2.5	8

Raspberry Pi direkt auf der VESA-Halterung montieren

Raspberry Pi Modell	Bohrungen	Montageteile
1B, 1B+, 2B, 3B	B (4x)	#5, #6, #7
Zero, Zero W	C (4x)	(4x) (4x) (8x)



Raspberry Pi Gehäuse auf der VESA-Halterung montieren

Gehäuse Model	Bohrungen	Montageteile
Official Case	B (4x)	#5 (4x), #7 (4x) <i>2.5mm Bohrungen müssen in untere Gehäusehälfte eingebracht werden</i>
OneNineDesign / RS Pro Case	D+G	#4 (2x)
ModMyPi Modular Case		
- Mittige Schrauben	E+F	#4 (2x)
- Äußere Schrauben	B (4x)	Schrauben aus dem Lieferumfang des Gehäuses
Flirc Aluminium Case	B (4x)	Schrauben aus dem Lieferumfang des Gehäuses
Welectron Basic+ Case	B (4x)	Schrauben aus dem Lieferumfang des Gehäuses
Welectron SnapFit Case	D+F	#4 (2x)

VESA-Halterung an einem Monitor befestigen

Befestigungsart	Bohrungen	Montageteile
VESA 75x75 mm	Y (2x)	
VESA 100x100 mm		
- Monitor auf eigenem Standfuß, VESA-Bohrungen frei	X (4x)	#2, #3
- Monitor an VESA-Halterung, VESA-Bohrungen belegt*	X (2x)	

* Befestigen Sie den Universal VESA Mount lediglich einseitig aufliegend auf der VESA-Halterung des Monitors.