



# Low Distortion Low Light USB Camera with Case



2MP Sony IMX323

(SKU: UB021201)

QUICK START GUIDE

## SPECS

Camera	
Sensor	1/2.9" IMX323
Resolution	2MP 1920H x 1080V
Data Format	MJPEG/YUY2/H.264
Minimum Illumination	0.01Lux@F1.2
Frame rate	MJPEG 30fps@1920 x 1080; YUY2 30fps@640 x 360; H.264 30fps@1920 x 1080.
Lens	
Field of View (FOV)	D=68°
Lens Mount	M12*P0.5mm
IR Sensitivity	Integral IR filter, visible light only
Functionality and Compatibility	
Auto Controlled Features	Contrast/ Saturation/ Exposure / White balance / Acutance/Brightness
Audio	Single microphone
System Compatibility	Win7/8/10, Linux, Mac and Android with UVC
Power	
Power Supply	DC 5V
Working Current	MAX 300mA
Physical	
Operating Temp.	-4°F~167°F (-20°C~+75°C)
Dimension	39x26x44mm
Connector No.	ZHR-4
Cable Length	3.3ft (1M)

## INTRODUCTION

### • About Arducam

Arducam has been a professional designer and manufacturer of SPI, MIPI, DVP and USB cameras since 2012. We also offer customized turnkey design and manufacturing solution services for customers who want their products to be unique.

### • About this USB Camera

The UB021201 is a new member of the Arducam's USB camera family. It's a 2MP, UVC compliant, low distortion, USB 2.0 camera. This USB camera is based on the 1/2.9" Sony IMX323 image sensor, and you can read more about its specs in the next chapter. Arducam also provides the sample application that demonstrates some of the features of this camera.

### • About UVC

The UB021201 is a UVC-compliant camera. The native UVC drivers of Windows, Linux and Mac shall be compatible with this camera so that it does not require extra drivers to be installed.

### • About Customer Service

If you need our help or want to customize other models of USB cameras, feel free to contact us at [support@arducam.com](mailto:support@arducam.com)

## QUICK START

### • How to download the program

Download the APP Amcap from the following link <https://www.arducam.com/downloads/app/AMCap.exe>

#### NOTE:

1. For Mac OS, please open the native software facetime and select the video camera "USB Camera" .
2. If used with the Andriod device, USB Camera APP and connect adapter are needed.
3. Please feel free to contact us if you need H.264 software.

### • How to connect the camera


Connect the one end of the USB cable to the connect- or provided on the back of UB021201, and connect the other end to the USB 2.0 host controller on the computer.

## How to use the program (Windows demo only)

The Menu bar at the top of the shown image contains few menu items and the current preview resolution and the frame rate are displayed on the bottom bar when the application is running. The following sections describe each of the menu items in detail.


### • Menu>Devices

This menu will show the available video devices to host PC. The UB021201 named "USB". This camera support capturing audio, so the menu shows the "Microphone (USB)".





### • Menu>Options

The options menu can be used to select the preview and audio and image parameters supported by this camera.





## How to use the program (Windows demo only)

### - Video Capture Pin

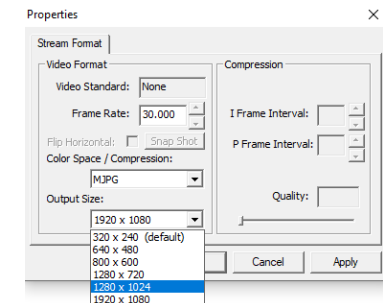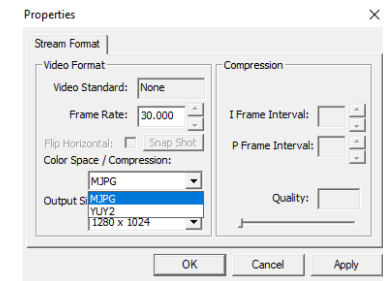

## How to use the program (Windows demo only)

### - Video Capture Filter -> Video Proc Amp/Camera Control

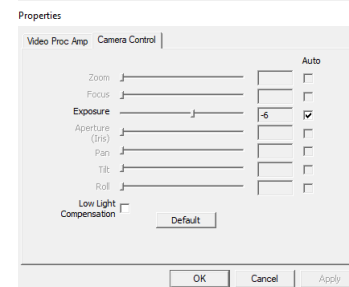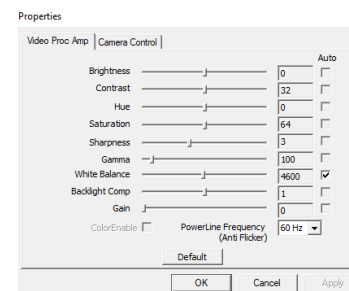

## How to use the program (Windows demo only)

### • Menu> Capture

The capture menu is used to capture the still image and video by using this application. You can also select the related parameters.

NOTE: If you want to get the voice from the microphone, you need to select the option "Capture Audio" before capturing video.

