

Arducam[®]

Datasheet

OV2710 Dual-lens Camera Module

B0198

CONTENT

1. Purpose
2. Effect
3. Technical parameters
4. Shape and Dimensions
5. Lens Specifications
6. Imaging
7. Camera Parameters Interface
8. Function Inspection Criteria
9. Visual inspection criteria
10. Reliability Test
11. Packaging requirements
12. Other

Version	Compile	Auditing	Authorize	DATE
V1.0	Bin L	Kai Z	Lee J	11.07.2019

1. Purpose

In order to fully describe the technical specifications referred to in technical cooperation, it usually needs to be expressed by a complete set of documents. As part of this, this datasheet specifies the specific technical specifications that a camera module should meet and is binding on this model.

2. Efficacy


This datasheet shall prevail if this it's inconsistent with the specifications in the general technical specifications of such goods,

3. Technical Parameters

Items	RGB Camera	IR Camera
Sensor	OV2710 OmniVision CMOS	OV2710 OmniVision CMOS
Sensor Size	1/2.7"	1/2.7"
Maximum Effective Resolution	1920(H)x1080(V)	1920(H)x1080(V)
Data Format	MJPEG/YUY2	MJPEG/YUY2
Pixel Size	3.0 μm x 3.0 μm	3.0 μm x 3.0 μm
Lens	FOV: 95°(D)	FOV: 95°(D)
	Optical length: 15.59MM	Optical length: 15.59MM
	Lens construction: 2G2P = IR	Lens construction: 2G2P = IR
	Mount: M12*P0.5mm	Mount: M12*P0.5mm
Focusing	Fixed focus	Fixed focus
IR Sensitivity	Visible light only	Infrared light only
Frame rate	MJPEG 30fps@1080P; YUY2 30fps@640 x 480.	MJPEG 30fps@1080P; YUY2 30fps@640 x 480.
Auto control	Saturation, Contrast, Acutance, White balance, Exposure.	
Dynamic Range	69 dB @ 8x gain	
Input Voltage	DC 5V	
Working Current	MAX 500mA	
Operating Temp.	-4°F~167°F (-20°C~+75°C)	
Cable Length	Default 1M, optional 2M, 3M, 5M	
System Compatibility	Windows, Linux, Mac, and Android with UVC	
Connector No.	ZHR-4	
Dimension	54mmx30mm	
Hole Pitch	50mmx26mm	

4. Overall Dimension Diagram

Unit: mm

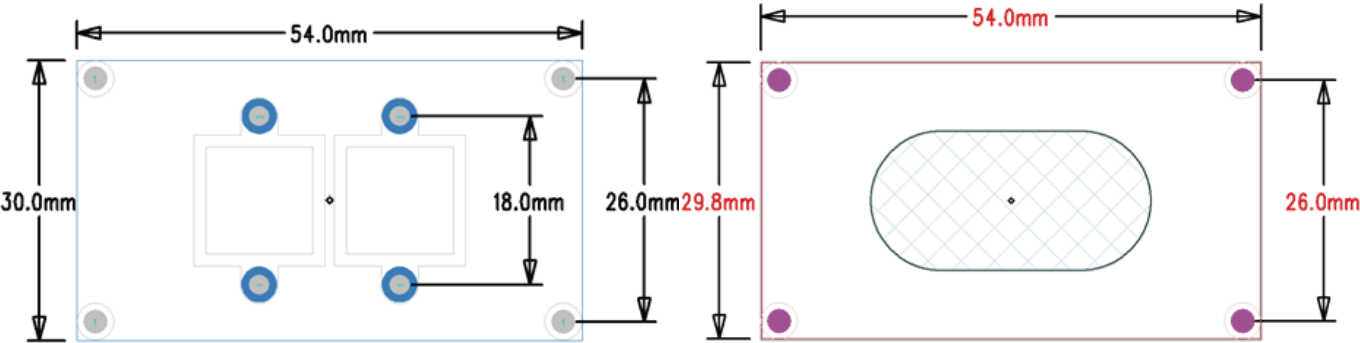


5. Lens Specifications


(Default, request the other lens please contact Arducam)

	SPECIFICATION	
1	SENSOR SIZE	1/2.7" for OV2710
2	WAVELENGTH	400-700nm(COLOR)
3	FOCAL LENGTH (EFL)	f=3.0±5%mm
4	F/NO (INFINITE)	F/NO=2.4
5	BACK FOCAL LENGTH	BFL=3.41±5%mm
6	FLANGE BACK LENGTH	FB=2.31±5%mm
7	FIELD OF VIEW (DIAGONAL)	∅6.7mm-95°±5%
8	OPTICAL DISTORTION (DIAGONAL)	-0.3%
9	HORIZONTAL ANGLE(DISTORTION)	∅5.85mm-85°±5%(-0.2%)
10	THREAD SIZE	M12XP0.5
11	ELEMENT	2G2P+IR
12	TEMPERATURE RANGE : OPERATING	-20°C~85°C
13	TEMPERATURE RANGE : STABLE IMAGE	0°C~45°C
14	IR FILTER SPEC	FILTER:Tavg>=88% at430-620nm T=50% at650±15nm Tavg<5% at700-1100nm

OPTICAL LAYOUT :
scale 4 : 1

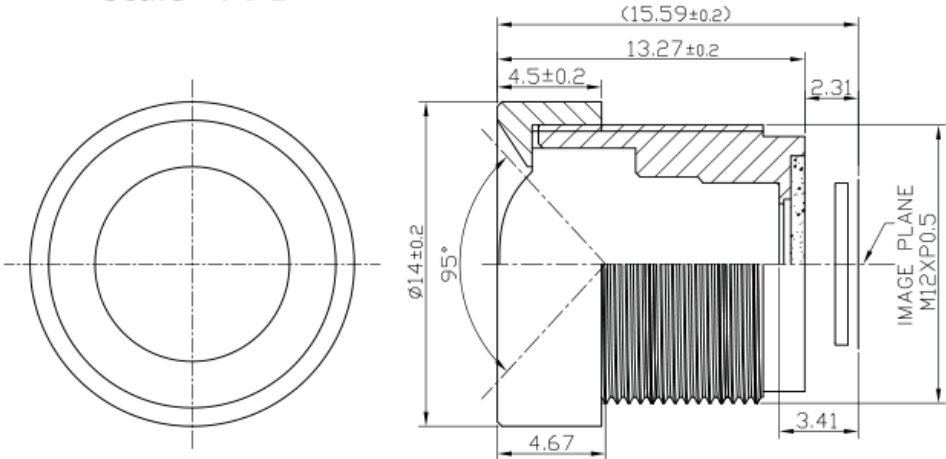


6. Imaging

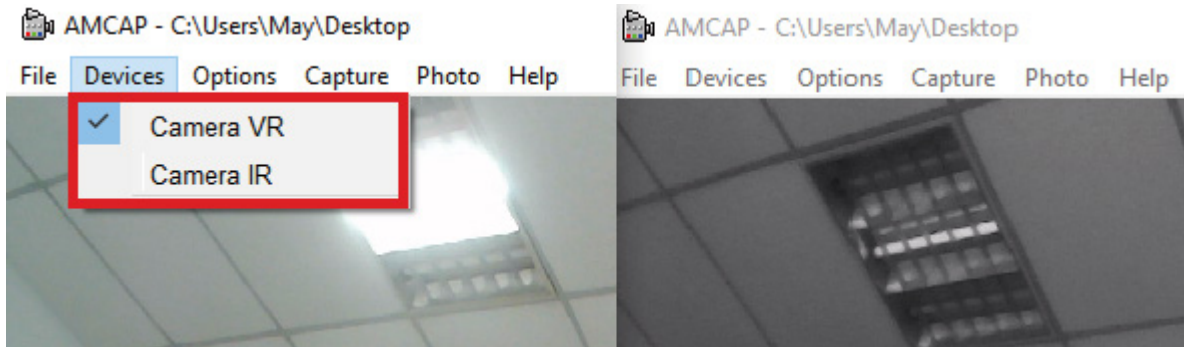


7. Camera Parameters Interface



- Video Proc Amp

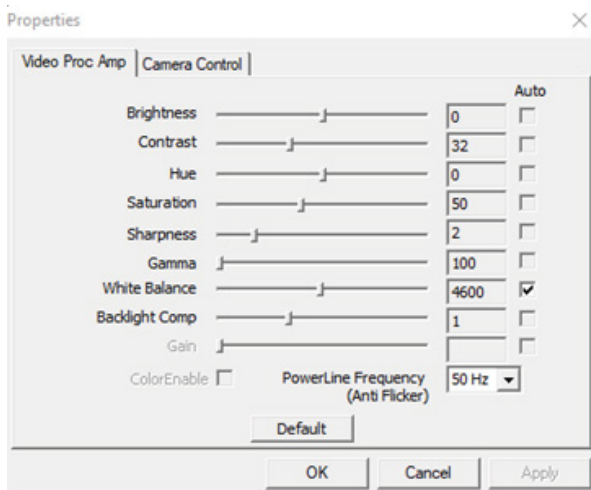

- Camera Control

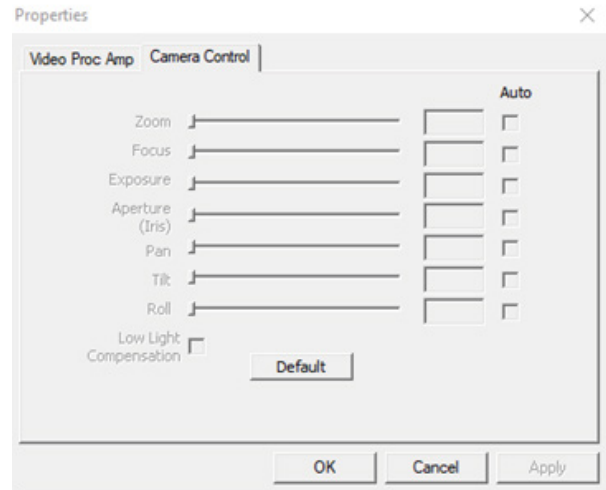

- Video Capture Pin

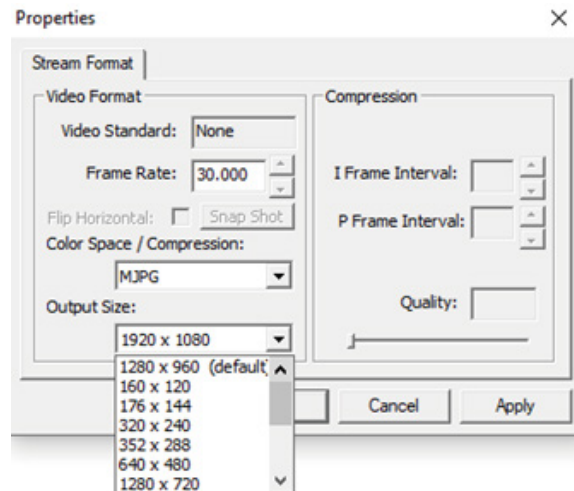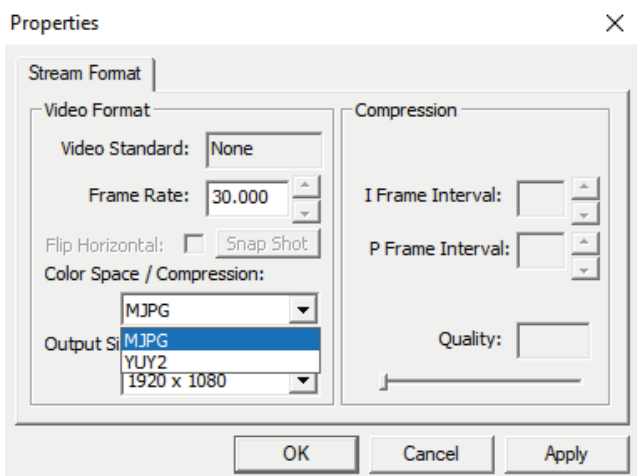

8. Function Inspection Criteria

8.1 Function definition:

Camera module electrical performance and image quality.

8.2 Inspection methods

- Staff: Visual inspection personnel need to be trained and have normal color recognition ability. Their vision should be above 1.0 (or more than 1.0 after correction is acceptable), and their color discrimination ability can pass standard tests.
- Tool: Connect the computer, inspect images with Amcap software.
- Distance and Time
Observation distance: 30~55cm
Observation time for each surface: 3~5seconds
- Inspection condition: Visual inspection should be performed under unobtrusive fluorescent lamps, and its minimum illumination should be above 100 feet of candlelight, or 60W fluorescent lamps, inspected at 1.5m distance.

8.3 Accept criteria

- The image has no mess, color screen and discoloration.
- There is no white spot, black spot, dirt or dark angle in the image.
- The image is same clear on all corners

9. Visual Inspection Criteria

9.1 The definition of the appearance

Camera module appearance.

9.2 Test methods

- Staff: Visual inspection personnel need to be trained and have normal color recognition ability. Their vision should be above 1.0 (or more than 1.0 after correction is acceptable), and their color discrimination ability can pass standard tests.
- Distance and Time
Observation distance: 50~75cm,
Observation time for each surface: 3~5seconds
- Inspection condition: Visual inspection should be performed under unobtrusive fluorescent lamps, and its minimum illumination should be above 100 feet of candlelight, or 60W fluorescent lamps, inspected at 1.5m distance.
- Observation angle: Observation angle between 40°~50°.

9.3 Accept criteria

- Cleanliness: Parts must be free of stains, dust, grease, and other stains. Smudges due to transportation materials are acceptable if they can be blown away or wiped off.
- Assembly surface: The parts to be assembled should avoid scratches, gouges, dents, bends, cracks, indentations, abrasions or other defects caused by improper assembly.

10. Reliability Test

Items	Condition	Specification
High Temperature Test	Temp.: 80°C	No abnormal
	Time: 96H	
Low Temperature Test	Temp: -20°C	No abnormal
	Time: 96H	
Humidity Test	Temp: 60°C	No abnormal
	Humidity: 80-85%	
Cable Tensile Strength Test	Time: 24H	No abnormal
	Loading weight: 4KG	
	Time: 60s	
Drop Test	Hight: 60CM	Electric normal
	Number of times: 10	
	On the wood	
Vibration Test	Vibration machine vibration frequency to 50Hz	Electric normal
	Vibration amplitude: 1.5MM;	
USB Connector	Vibration time: 30 Minutes	Electric normal
	Number of times: 250	

11. Packing Request

- Products should be strictly based on product characteristics to develop corresponding packaging standards and follow the implementation to ensure that the product is used within the specified use and storage period, to achieve anti-static, moisture-proof, shock-proof, mildew-proof, anti-barbaric handling and other signs and related warranty requirements. Product packaging should be marked: Supply-side name / logo, Product Model specifications, containing the number, production date / batch number and order number.
- The product's outer packaging should be marked with: supplier name / sign, product model specification, built-in quantity, production date / batch number and order number.
- The packing and packing scheme are based on the customer's requirements, and the two parties will negotiate the specific details. The sealed samples shall prevail.

12. Others

- Changes to this acknowledgement need to be confirmed by both parties, and any modification by either party is invalid.
- This acknowledgment must be signed and returned within seven working days of receipt by the client, late regarded as the default.